

OSC 92NU900 Homogenizer

<Features>

- Despite of having full functions, such as a timer, high speed operation, this is an affordable and compact unit
- Being incorporated with power switch, timer, rotational speed setting, easily operated safely by any one without special training/technique

Type A

- Disinfection and cleaning of the unit can be easily done as material of liquid contact section is SUS304 and a cutter is easily detached

Type C

- High speed homogenizer employing a small type high frequency motor and automatic control by an inverter
- Inverter automatic control method enables to use the unit on the same conditions.
- Contamination is not generated as carbon brush is not used.




<Specifications>

Model	OSC 92NU 900A	OSC 92NU 900C
Motor	100W	150W high frequency motor
Rotational speed	18,000 rpm	18,000 rpm
Capacity	30 ~ 1,000 mL	30 ~ 1,000 mL
Control method	Thyristor	Inverter
Timer	15 min. and continuous	10sec.~60 min. and continuous
Overall dimensions	250W x 250D x 396H mm	250W x 250D x 413H mm
Weight	Approx. 6 kg	Approx. 8 kg

<Optional parts>

Set of contents

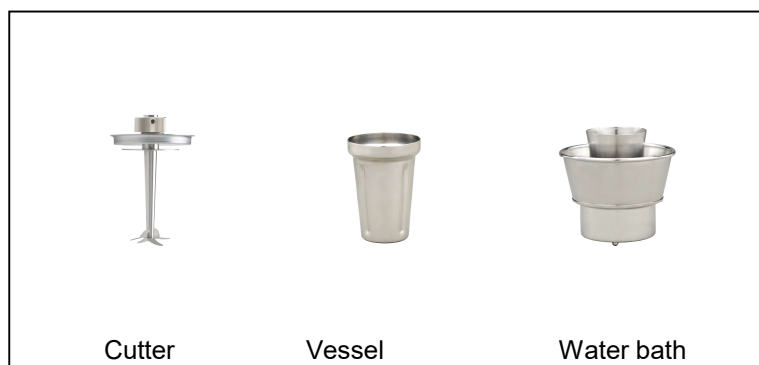

Capacity	100 mL	(Process range 30~100 mL)
	200 mL	(Process range 60~200 mL)
	500 mL	(Process range 100~500 mL)
	1,000 mL	(Process range 500~1,000 mL)

*The above photo shows a set of 100 mL as an example.